


**Wide Open Gas Capacities  
 1008A Adjustable Port Valves  
 (0.6 specific gravity gas)**


For other gravities, multiply these capacities by the following factors:

Gravity	Factor	Gravity	Factor
0.40	1.220	1.00	0.775
0.55	1.040	1.50	0.630
0.65	0.960	1.95	0.550

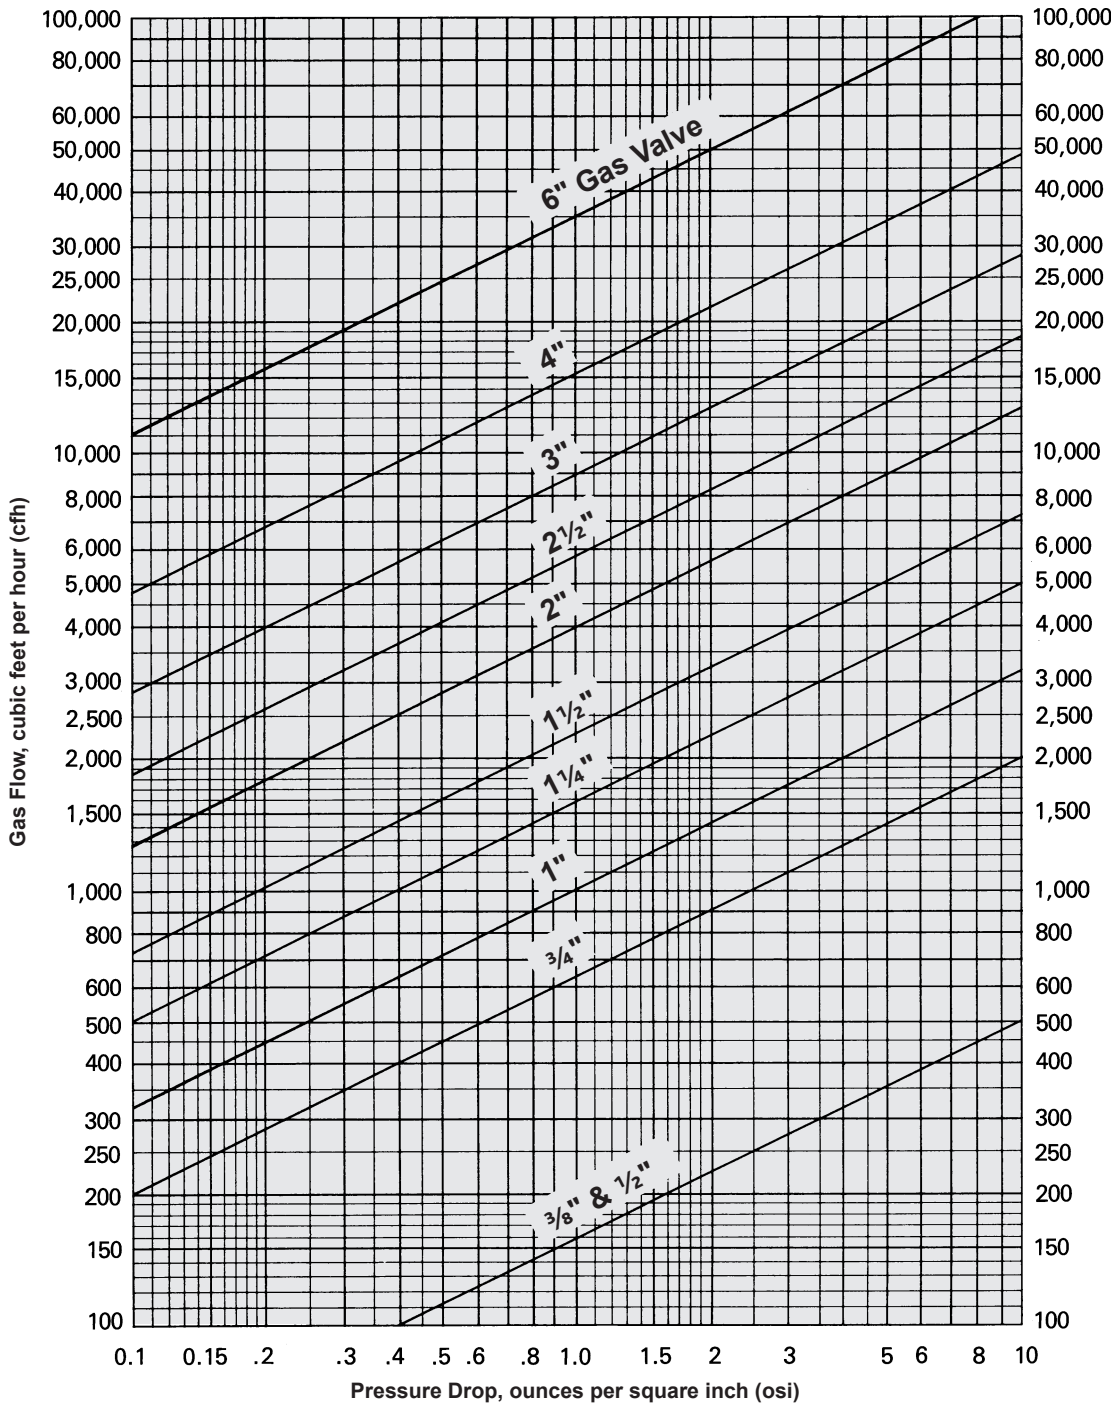

## Wide Open Water and Oil Capacities 1008A Adjustable Port Valves

Flow is proportional to the square root of the pressure drop across the valve, except for fluids having high viscosities.  
Oil suitable for atomization at the burner (viscosity no greater than 150 SSU) follows the square root law.

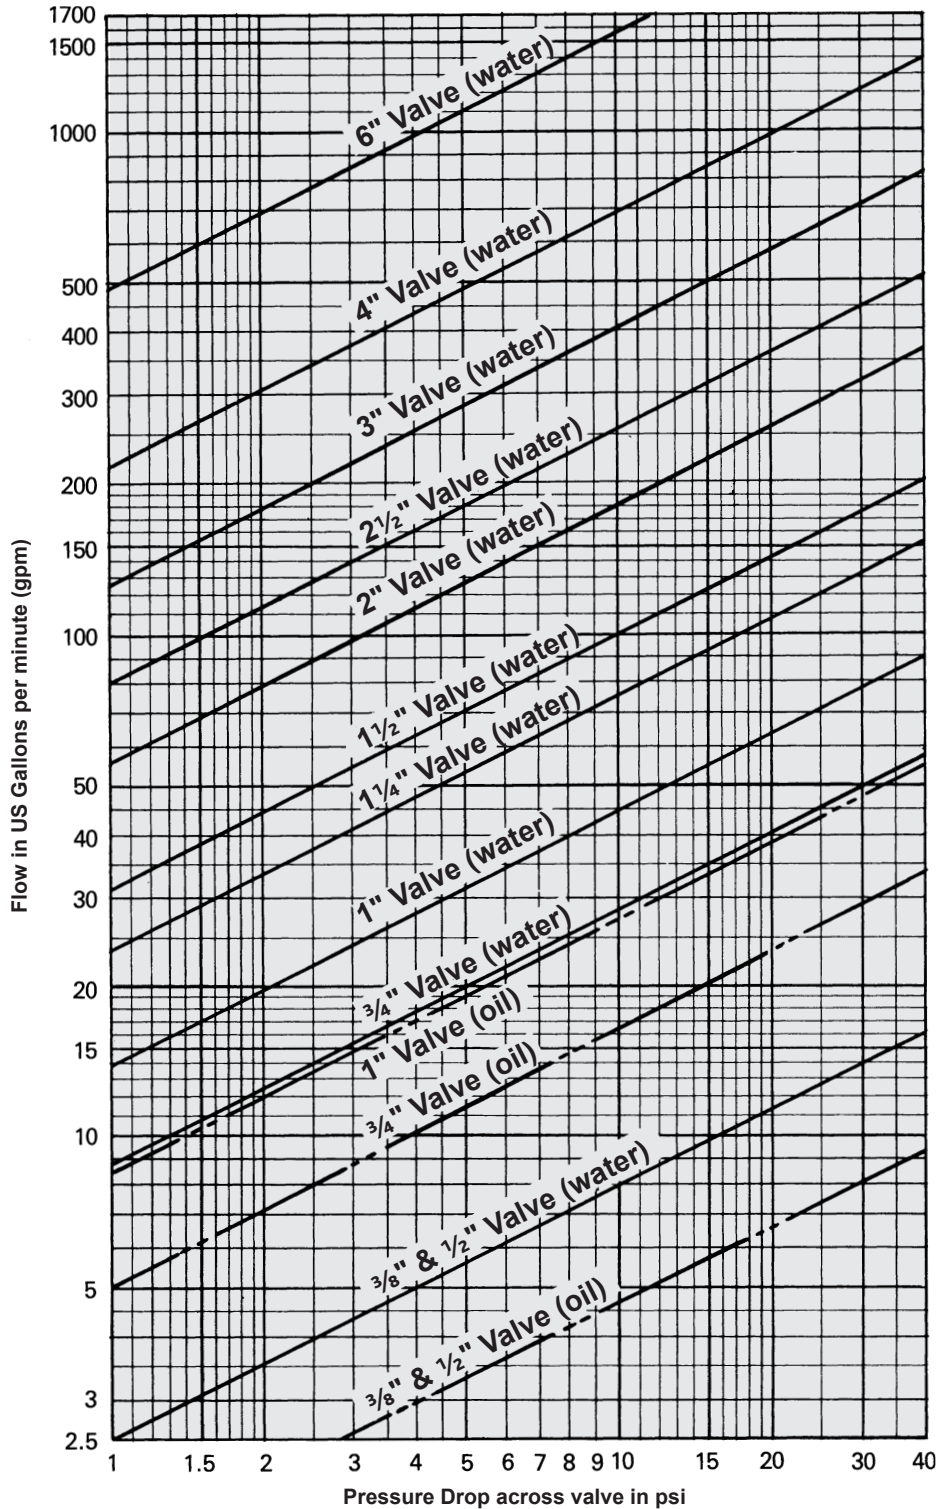

**WARNING:** Situations dangerous to personnel and property may exist with the operation and maintenance of any combustion equipment. The presence of fuels, oxidants, hot and cold combustion products, hot surfaces, electrical power in control and ignition circuits, etc., are inherent with any combustion application. Parts of this product may exceed 160F in operation and present a contact hazard. Fives North American Combustion, Inc. urges compliance with National Safety Standards and insurance Underwriters recommendations, and care in operation.

Fives North American Combustion, Inc. - 4455 East 71st Street - Cleveland, OH 44105 USA - Phone 216.271.6000  
Fax 216.641.7852 - email: [fna.sales@fivesgroup.com](mailto:fna.sales@fivesgroup.com) - [www.fivesgroup.com/fivesna](http://www.fivesgroup.com/fivesna)